

DESCRIPTION

The VP-1120B is a power amplifier that is rated at 120 W output. It can be used as desk-top or rack mounting type.


SPECIFICATIONS

Power Requirement	220~240 V AC 50/60 Hz, 24 V DC
Power Consumption	29 VA at no-signal, 350 VA at rated output
Inputs	Program inputs : 0 dBV 100 kΩ (balanced) × 2 (parallel) Priority inputs : 0 dBV 100 kΩ (balanced) × 2 (parallel)
Output Power	120 W RMS
Impedance	83 Ω (100 V), 41 Ω (70 V), 21 Ω (50 V), 4 Ω (22 V)
Frequency Response	40 Hz ~ 16,000 Hz ±2 dB (at 1/3 rated output)
S/N Ratio	80 dB
Distortion	Less than 1% (at rated output f=1 kHz sine wave)
Indicators	Green LED for power indicator Red LED for priority indicator
Finish	Black
Dimensions (W×H×D)	216 (8.50")×144 (5.67")×340 (13.39") mm
Weight	10.3 kg (22.71 lb)

※Electrical properties given in the above specifications were measured at 230 V AC power supply.


APPEARANCE

Rear View

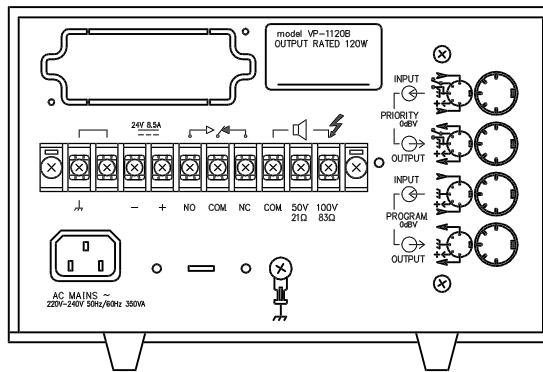

216(8.50")

Front View

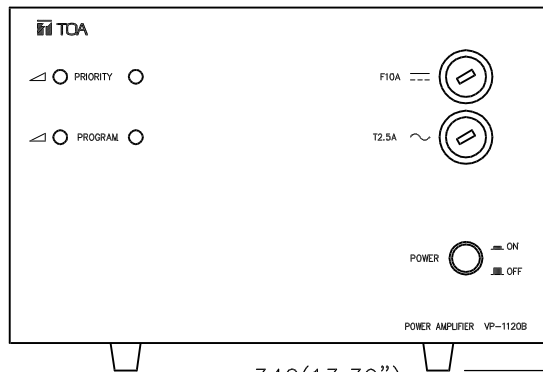


133(5.24")

144(5.67")

340(13.39")

320(12.60")

Side View

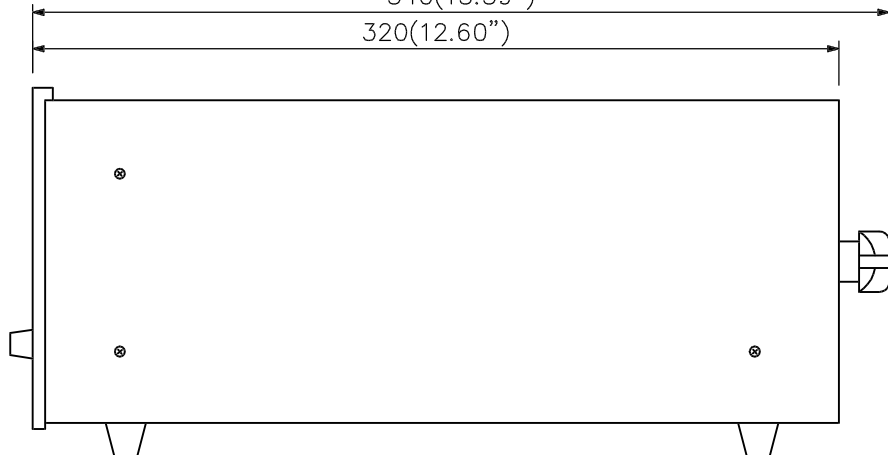

UNIT:mm SCALE:1/3